


Contained in the bolt kit are 5 M8x80 bolts, which can be used if the rack is located where the holes can be drilled straight through the floor and the 50mm washers(6) used underneath. If the holes cannot be located, then the M6x75 self tappers with M6x25mm washers are to be used.

EXTREME CAUTION needs to be exercised when drilling through the floor to avoid fuel lines, brake lines etc

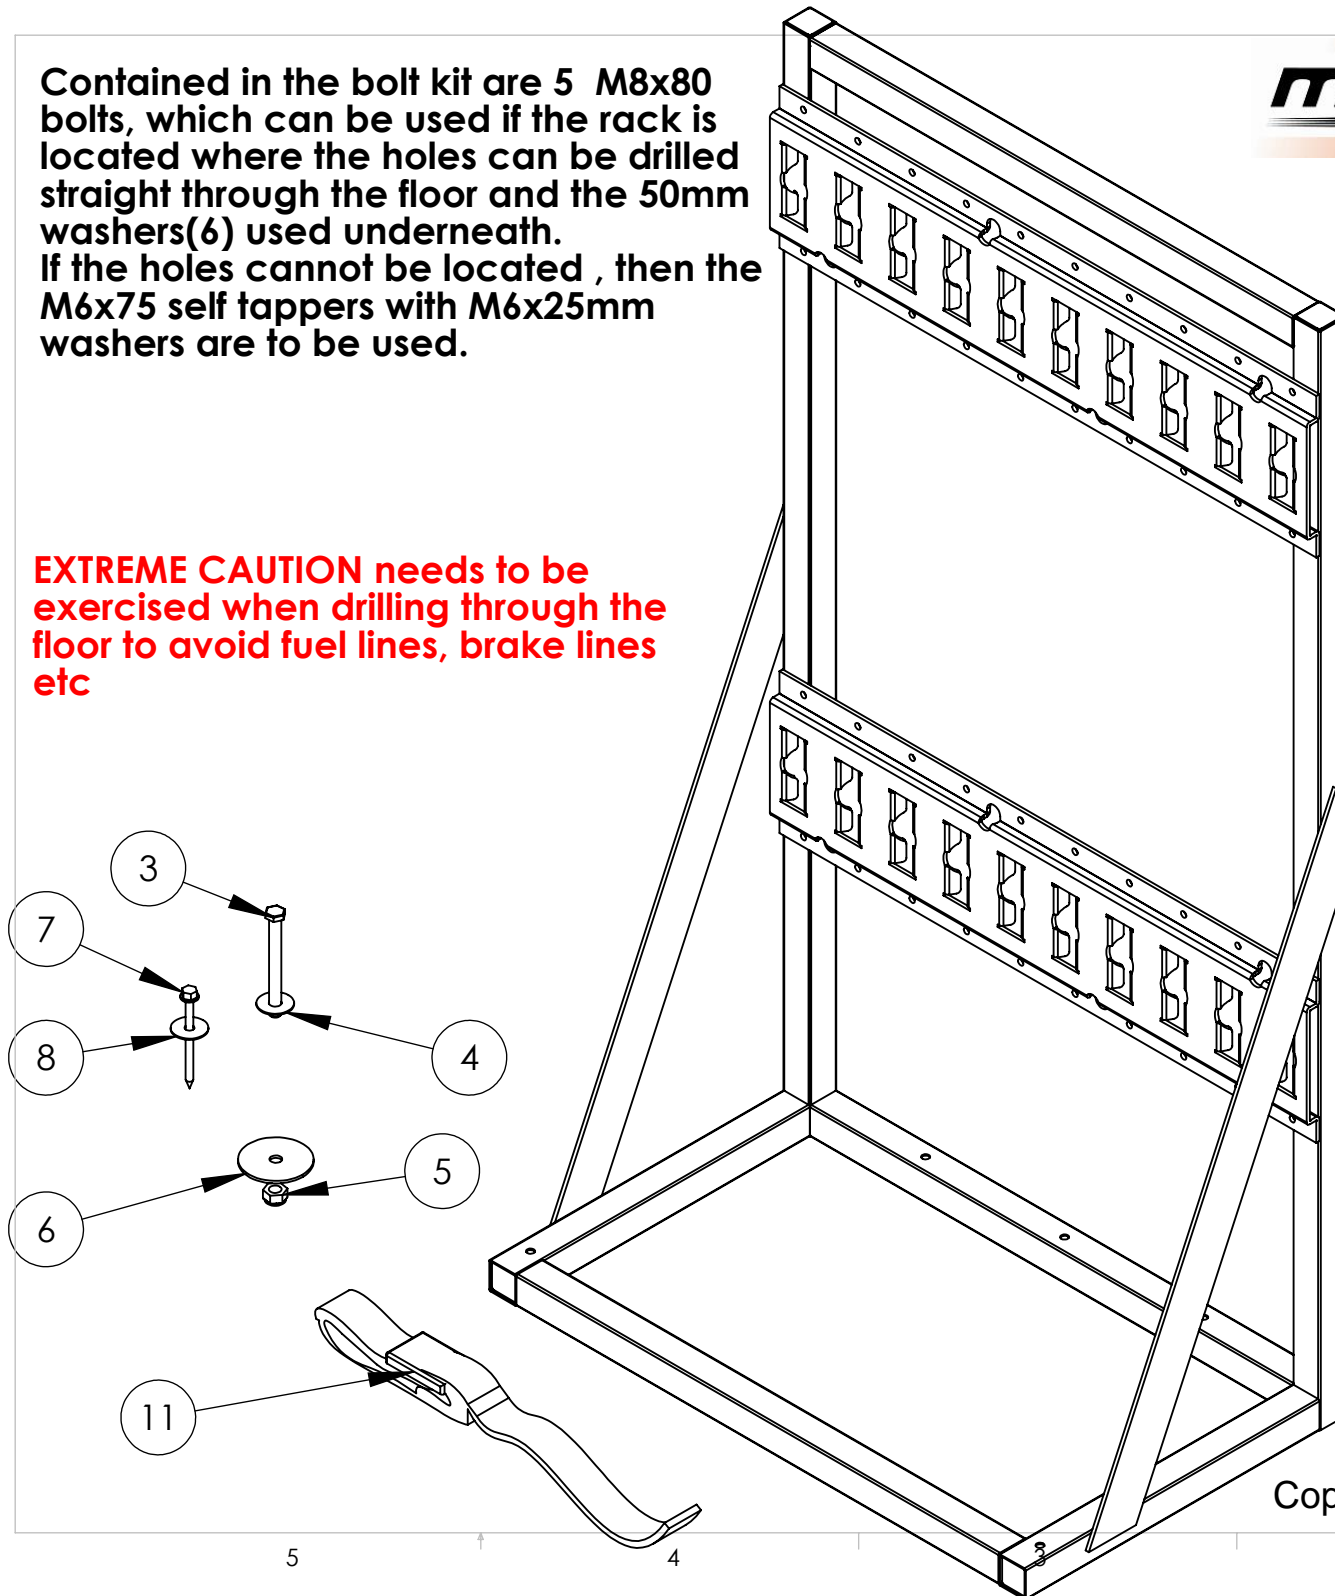

| ITEM NO. | PART NUMBER | QTY. |
|----------|-----------------------------|------|
| 3 | M8x80mm bolt | 5 |
| 4 | 8mm x 25mm washer | 5 |
| 5 | M8 P Type nyloc nut | 5 |
| 6 | 8mm x 50mm washer | 5 |
| 7 | M6 x 75mm self tapping bolt | 5 |
| 8 | 6mm x 25mm washer | 5 |
| 9 | strap. part no. CMS0025 | 1 |
| 11 | strap | 1 |

TITLE:

Gas bottle rack fitting instructions

Bolt kit: blk007